



COLLOMATIC

The new TMX 1000 & 1500 forced-action mixer

Increase your productivity
on the construction site:
TMX helps you mix faster,
easier and has an eye on your safety



Picture similar

Materials and applications

• Grout •



• Concrete •



• Synthetic resin screed •




• Stucco •



• Drainage mortar •




• Mortar •

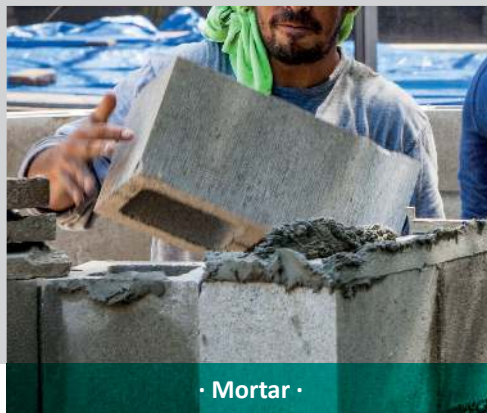

TMX Forced-Action Mixer

- Sturdy mixer for bagged material
- Usable volumes of up to 32 gal. or 5 bags (TMX 1500)
- For sand- and gravel-filled mortars, lime plaster, drainage mortar, resin screeds, monograin concrete, grout and many more
- If the material gets stuck just use the one-of-a-kind-shaker and it will pour out easily through the gravity-feed trap door. No need to risk your safety by cutting out the grate.
- The TMX has the best in class dust removal feature. A removable lid covers more than 50% of the safety hood. In combination with a dust extractor you can leave your mask at home and your lungs are protected from harmful material dusts.
- Made to fit through standard doors with 31" width so you can move it as close as possible to where you need it
- Two big wheels make it easier to maneuver even on the rough ground of construction sites.
- The three-arm mixing tool, with its low rotation speed, is exclusively designed by leading German engineers.
- The TMX is ideal for heavy materials which will give you the best mixing results, so that you can be productive elsewhere on the site.

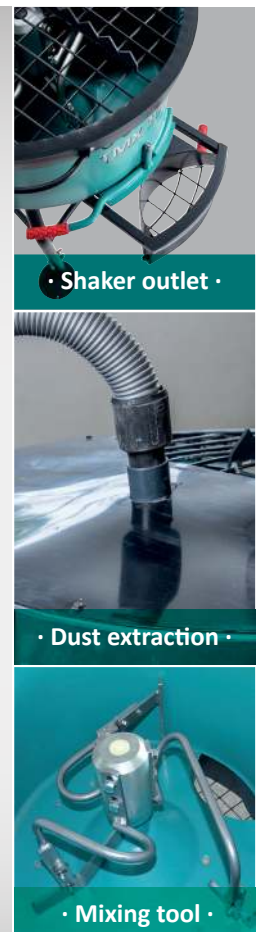

Material

Concrete up to .63" grain size	+
Synthetic resin screed	+
Cement and universal mortar	+
Lightweight masonry mortar	+
Stucco	+
Lime plaster	+
Natural stone mortar/cobblestone mortar	+
2K pavement grout (up to 1")	+
Thin/fluid concrete types	-
Thin/fluid mortar types	-
Tile adhesive	-
Levelling compounds/self-levelling fillers	-
Packing mortar	+
Steel fibre mortar	+
Lightweight aggregate	+
Drainage mortar	+
Monograin mortar	+

Technical data TMX 1000 & TMX 1500

	TMX 1000	TMX 1500
Capacity:	26 gal.	40 gal.
Usable volumes:	20 gal.	32 gal.
Motor output:	2.0 kW	2.8 kW
Horsepower:	2.7 Hp	3.6 Hp
Voltage:	110 V / 60 Hz	240 V / 60 Hz
Speed of mixing tool:	30 rpm	30 rpm
Height to bottom edge of discharge chute:	625 mm	625 mm
Dimensions:		
Length:	33.1"	33.1"
Width:	29.7"	29.7"
Height:	46.1"	49.6"
Noise emissions:	86 dB	85 dB
Weight:	288 lbs.	304.2 lbs.
Item no.:	37082	37083

Your Collomix specialised dealers:



Collomix North America | P.O. Box 13007 | Milwaukee, WI 53213 | Germany
 info@collomix.de | www.collomix.com

